



FLASH GUARD 13R8

HEAVY DUTY PROFESSIONAL LAMINATOR



Professional Quality:
Bubble-free, crystal clear finish
for all of your laminated documents

- Laminates pouches up to 13" wide
- 8 heavy duty rollers
- Variable temperature and speed
- LCD control panel
- All metal, stay-cool housing

FORMAX®

www.formax.com

Local Dealer:

The **FlashGuard 13R8 Heavy-Duty Laminator** is ideal for print shops, school systems, universities, and offices. With a **rugged metal housing that stays cool to the touch**, it easily laminates and protects photos, documents, signs, menus, IDs, and more. The 13R8 features an **8 heavy-duty roller system** for fast, reliable sealing, as well as **variable temperature and speed settings**. Operation is simple using the **graphics-based LCD control panel**, and users can even store up to **2 custom jobs**. It handles pouches up to 13" wide, up to 14 mil, with **maximum laminating thickness of up to 3mm**. It ships with a **starter pack of 3 mil laminating pouches**. The FlashGuard 13R8 is a durable, affordable, high-quality laminating solution.

Rugged Metal Housing:
Cool to the touch, and sturdy for years of reliable use

8 Heavy Duty Rollers:
Consistent heat and pressure regardless of speed, with six heating and two cooling rollers.


Graphics Based LCD Status Screen:
Displays speed, temperature, mode, roller operation, fan operation

Heat/Speed Chart:
Quick reference chart printed right on the laminator for ease of use

13" Infeed:
Laminates pouches up to 13" wide

Variable Temperature & Speed:
Users can adjust to match pouch and item thickness

User-Friendly Control Panel:
Soft-touch buttons including hot/cold, reverse, and 2 memory buttons to store frequently used settings

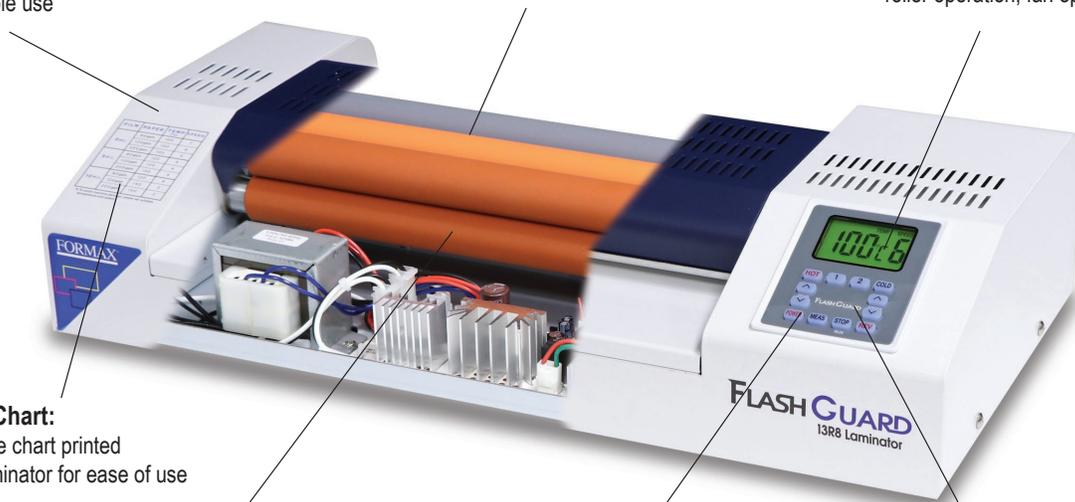

STANDARD FEATURES

- 8 heavy duty rollers
- Rugged all-metal, cool-touch housing
- Graphics-based LCD status screen
- Laminates pouches up to 13" wide
- Variable temperature and speed
- Cold laminating function
- Quick reference heat/speed chart
- Laminates up to 82" per minute
- Stores up to 2 custom jobs
- Includes 3 mil pouch starter pack

OPTIONS

- FG-3 Premium 3 mil Hot Laminating Pouches: pack of 100
- FG-5 Premium 5 mil Hot Laminating Pouches: pack of 100



SPECIFICATIONS

Max Pouch Width	Up to 13" (330mm)
Max Speed	Up to 82" per minute (2,100mm/min)
Max Pouch Thickness	Up to 14 mil (350 mic)
Max Laminating Thickness	Up to .118" (3mm)
Number of Rollers	8 (6 heating, 2 cooling)
Temperature	Up to 320 degrees F (160 C)
Temp & Speed Control	Yes
Preheating Time	6 minutes
Dimensions	21" L x 10.6" D x 5" H (536 x 271 x 112mm)
Weight	34 lbs (15kg)
Power	1,500 watt 110-120V, 50/60Hz, 15A